

User Manual

xTablet T1110



User Manual

xTablet T1110

Contents

Copyright and Trademark Notice	3
FCC Information	4
IC Statements	5
Safety Instructions	6
Introduction	8
Product Overview	9
Specifications	13
Power Supply	14
Battery	15

Copyright and Trademarks Notice

All marks and names mentioned may be trademarks of their respective owners. No warranty as to accuracy or completeness is expressed or implied. We reserves the right to make changes to this document without prior notice.

Revision History

- ▶ **Version: 1.0**
- ▶ **Date: 07, 2023**

FCC-B Radio Frequency Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and radiates radio frequency energy, and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- ▶ **Reorient or relocate the receiving antenna.**
- ▶ **Increase the separation between the equipment and receiver.**
- ▶ **Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.**
- ▶ **Consult the dealer or an experienced radio TV technician for help.**

NOTE

- ▶ **The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.**
- ▶ **Shield interface cables and AC power cord, if any, must be used in order to comply with the emission limits.**

FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- ▶ **This device may not cause harmful interference.**
- ▶ **This device must accept any interference received, including interference that may cause undesired operation.**

FCC/IC RF Radiation Exposure and SAR Statements

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End user must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The device is designed to meet the requirements for exposure to radio waves established by the Federal Communications Commission (USA). These requirements set a SAR limit of 1.6 W/kg averaged over one gram of tissue. The highest SAR value reported under this standard during product certification for using at the body is 0.935 W/kg.

This equipment complies with Industry Canada radiation exposure limits set forth for an uncontrolled environment. End user must follow the specific operating instructions for satisfying RF exposure compliance.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. The device is designed to meet the requirements for exposure to radio waves established by the Industry Canada. These requirements set a SAR limit of 1.6 W/kg averaged over one gram of tissue. The highest SAR value reported under this standard during product certification for using at the body is 0.935 W/kg. The device is restricted to indoor use only when operating in the 5150 to 5250 MHz frequency range.

IC Statements

This device complies with Industry Canada RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. il ne doit pas produire de brouillage et
2. l'utilisateur du dispositif doit être prêt à accepter tout brouillage radioélectrique reçu, même si ce brouillage est susceptible de compromettre le fonctionnement du dispositif.

**This Class B digital apparatus complies with Canadian ICES-003.
Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.**



CE Conformity

This device is in compliance with the essential safety requirements and other relevant provisions set out in the European Directive.

Battery Regulations

European Union: Batteries, battery packs, and accumulators should not be disposed of as unsorted household waste. Please use the public collection system to return, recycle, or treat them in compliance with the local regulations.



BSMI: For better environmental protection, waste batteries should be collected separately for recycling or special disposal.

California, USA: The button cell battery may contain perchlorate material and requires special handling when recycled or disposed of in California.
For further information please visit: <http://www.dtsc.ca.gov/hazardouswaste/perchlorate/>

Safety Guideline for Using Lithium Battery

Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the equipment manufacturer. Discard used batteries according to manufacturer's instructions.

WEEE Statement



European Union: Under the European Union ("EU") Directive on Waste Electrical and Electronic Equipment, Directive 2002/96/EC, which takes effect on August 13, 2005, products of "electrical and electronic equipment" cannot be discarded as municipal waste anymore and manufacturers of covered electronic equipment will be obligated to take back such products at the end of their useful life.

Safety Instructions



Read the safety instructions carefully and thoroughly. All cautions and warnings on the equipment or user's manual should be noted.



Keep this equipment away from humidity and high temperature.



The openings on the enclosure are used for air convection to prevent the equipment from overheating. Do not cover the openings.



- Do not leave the equipment in an unconditioned environment with a storage temperature above 50°C (122°F) or below -10°C (14°F), which may damage the equipment.
- This unit should be operated under maximum ambient temperature of 40°C (104°F).

Followings are requirements of battery storage:



1. Storage temperature up to 3 months should remain between -20° ~45°C ;
Storage temperature of 3 months to 1 year should remain between 23°± 2°C.
2. The battery capacity should remain at 30 ± 5%.
3. The storage humidity should remain at 65 ± 25%RH.
4. The battery charging temperature 10° ~45°C , discharging temperature -20° ~60°C.
5. For the maximum battery discharging performance, storage temperature = 25°C.
6. Do not charge the battery while the room temperature is over 40°C.



Make sure the power voltage is within safety range and has been adjusted properly to the value of 100~240V before connecting the equipment to the power outlet.

- Always unplug the AC power cord before installing any add-on card or module to the equipment.
- Always disconnect the AC power cord or uninstall the battery pack or switch off the wall socket if the equipment would be left unused for a certain time to achieve zero energy consumption.



Place the power cord in a way that people are unlikely to step on it. Do not place anything on top of the power cord.



Always keep strong magnetics or electrical objects away from the tablet.



To avoid damage or electrical shock never pour liquid into any opening.

If any of the following situations arise, have the equipment checked by a service personnel:



- The power cord or plug is damaged.
- Liquid has penetrated into the equipment.
- The equipment has been exposed to moisture.
- The equipment is no longer working properly.
- The equipment was dropped and damaged.
- The equipment has obvious signs of breakage.

Green Product Features

- Reduced energy consumption during use and stand-by
- Limited use of substances harmful to the environment and health
- Easily dismantled and recycled
- Reduced use of natural resources by encouraging recycling
- Extended product lifetime through easy upgrades
- Reduced solid waste production through take-back policy



Environmental Policy

- The product has been designed to enable proper reuse of parts and recycling and should not be thrown away at its end of life.
- Users should contact the local authorized point of collection for recycling and disposing of their end-of-life products.

Introduction

Congratulations on the purchase of MobileDemand's rugged xTablet® T1110. Designed and tested to meet our exacting standards ensures dependability and customer satisfaction.

Refer to this manual to guide you through the basic functions and features.

Unpacking

Unpack the shipping carton and check all items carefully. If any item is damaged or missing contact MobileDemand. Please keep the box and packing materials in the event you need to ship the unit. The package should contain the following items:

- xTablet T1110
- Type-C/Power Delivery adapter and AC power cord
- Hand strap
- Brief case handle
- Stylus (optional)
- Stylus holder (optional)
- Quick Start Manual (optional)

Product Overview

Front View



1. Front Camera

2. Status LEDs

Power

- LED glows when the tablet power is turned on.
- LED flashes when the tablet goes to the sleep state.
- LED goes off when the tablet is turned off.


Battery Status

- LED glows when the battery is being charged.
- LED goes out when the battery is fully charged or when the AC/DC adapter is disconnected.
- LED blinks slowly when battery capacity is lower than 7%.
- LED blinks fast when battery error.

3. Touch Screen


Whenever the display is rotated, the touch screen will rotate and expand to fit the display automatically.
(NOTE: This function can be changed in the user's settings.)

Top View

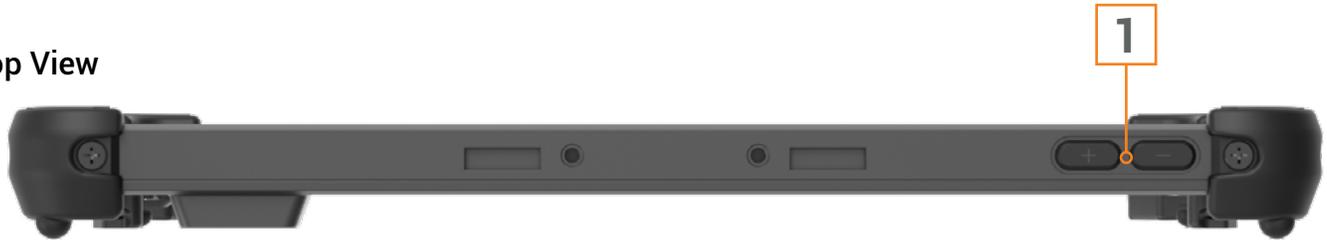

1. Volume Button

Bottom View

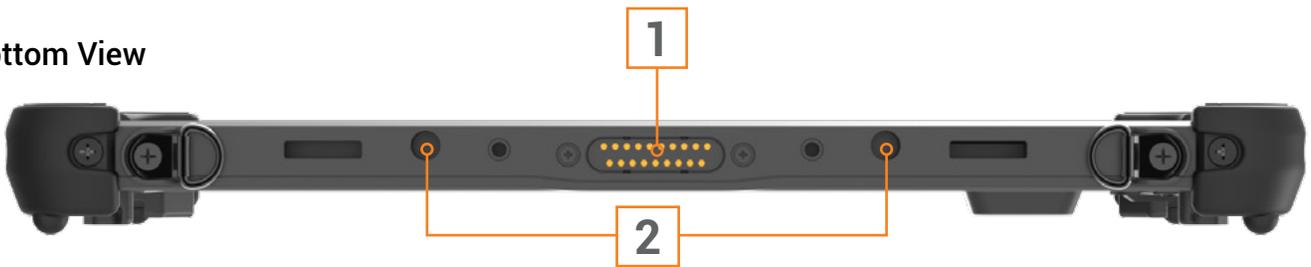


1. Dock Connector
Connect with external Docking station to increase more I/O functions.
2. Boss Hole
Used for locking the boss hole of the dock.

Right Side View



1. Kensington Lock
Allows users to secure tablet in place.

Left Side View

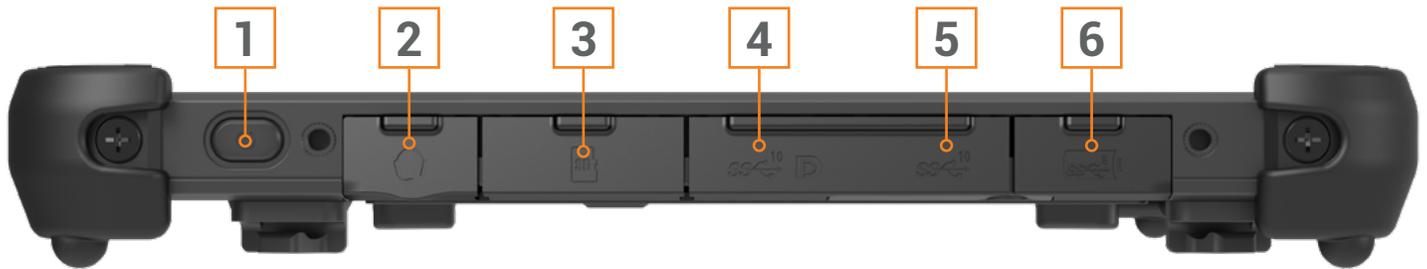

1. Power Button

- ▶ Before powering on the Tablet PC for the very first time, you must connect it with AC power.
- ▶ Press and hold the power button for 2 seconds can shut down the Tablet.

2. Mic-in/ Headphone-out combo Jack

Used for connecting the speakers or headphones.

(NOTE: The diameter of 3.5mm headset plug has to be lower than 5mm.)

3. Micro SD Card Reader

The built-in card reader supports SD card.

4. USB 3.2 Gen 2 Port (Type-C) (with DisplayPort function)

USB 3.2 Gen 2, the Super Speed USB, delivers the higher interface speeds for connecting various devices, such as storage devices, hard drives, or video cameras, and offers more advantages over high-speed data transferring.

The slim and sleek USB Type C connector features reversible plug orientation and cable direction and supports 5V/2A portable charging power when AC power is connected. However, the maximum portable charging power limitation may up to 5V/1.5A while only battery DC power is connected. And it also supports scalable performance to future-proof solution, including USB 3.x, DisplayPort, Audio.

5. USB 3.1 Gen 1 Port


USB 3.1 Gen 1, the Super Speed USB, supports high-speed data transfer for the connected devices, such as storage devices, hard drives, or video cameras.

6. USB 3.0 Gen 1 Port (Type C)(with PD-IN 20V)

USB 3.0 Gen 1, the Super Speed USB, supports high-speed data transfer for connected devices, such as storage devices, hard drives, or video cameras.

The slim and sleek USB Type C connector offers reversible plug orientation, and supports 5V/1A portable charging power.

Back View

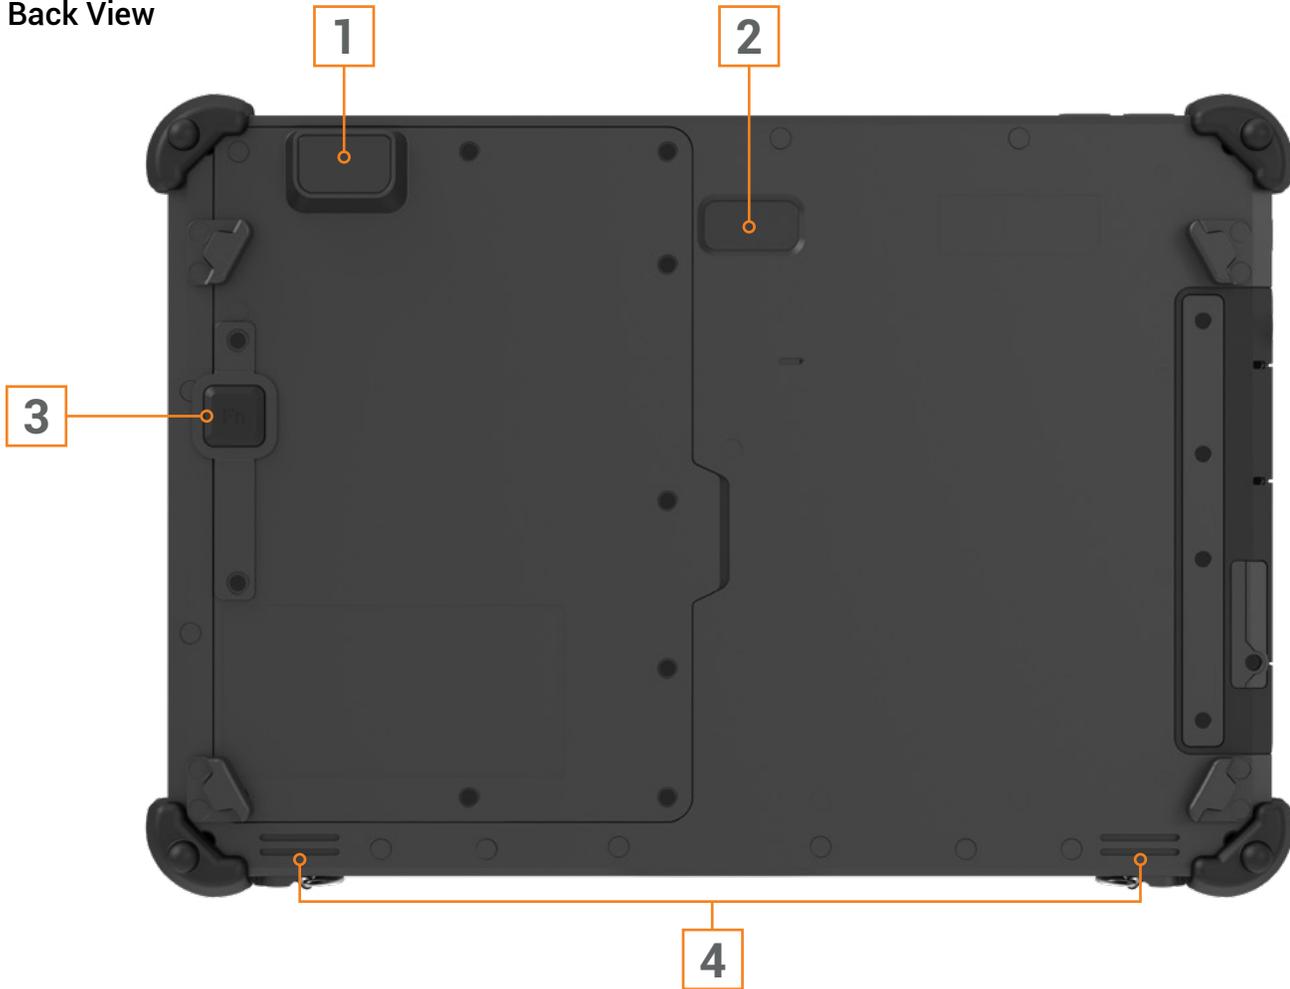

1. Barcode Scanner

2. Rear Camera

This built-in rear camera can be used for photos, video recording, conferencing, and other interactive applications.

3. F1 Function

Programmable function key and default setting is Barcode Scanner trigger function. (optional)
User Defined programmable function key.

4. Speakers

Specifications

The specifications listed here are for reference only, and may change without notice.

DIMENSIONS	274mm W x 189mm H x 15mm D 10.78" W x 7.44" H x .59" D Weight - 995g 2.19lbs	I/O PORTS	USB 3.1 Type-A USB Type-C 3.0 (PD-in) USB Type-C 3.1 (with DisplayPort) Micro SD Card Audio Jack USB (2.0) Docking Connector (19 Pin Pogo)
DISPLAY	10.1" Sunlight Viewable WUXGA 800x1280 LCD; 500 nits 10-point multi-touch capacitive screen	CAMERA	Front - 2MP Rear - 8MP AF with flash
CPU	Intel® Pentium N6415 (Quad Core) 1.20 GHz burstable to 3.00 GHz	AUDIO	Realtek Audio Dual microphone array 2 integrated speakers
MEMORY	8GB LPDDR4 (on board)	SCANNER	Optional Honeywell N4680 2D barcode scanner
STORAGE	256GB; M.2 SSD PCIe Gen3	BUTTONS	Function (including scan function) Power Volume +/-
O/S	Windows 11 Pro Optional: Windows 10 Pro Downgrade; LTSC	SENSORS	Accelerometer Gyroscope E-Compass
GRAPHICS	Intel UHD Graphics	BATTERY SYSTEM	7.7V, 43Wh, 5585mAh Li-Polymer Up to 12Hr battery life ¹
RUGGEDIZED		WIRELESS/NETWORK	
MIL-STD 810G	5' drop	WLAN	Wi-Fi 802.11 a/b/g/n/AC/AX Intel Wi-Fi 6 AX200
Sealing	IP65 (dust and water)	Bluetooth	5.2
1M Tumble Test	40x	GPS	uBlox NEO-M8N/M9N
Steel Ball Drop Test	25mm diameter, 250gm from 50cm	SECURITY	Kensington Lock TPM 2.0
Screen Protector	Standard and Anti-Glare: Oleophobic, scratch-resistant glass	AGENCY APPR	FCC, IC, CE, UKCA, RoHS, WEEE
Operating Temp	32° F to +122° F (0° C to +50° C)		
Storage Temp	14° F to +140° F (-10° C to +60° C)		
Operating Humidity	5% to 95%		

¹Battery life varies significantly depending on settings, app usage, and other factors

Getting Started

Power Supply

This section provides basic safety precautions when using an AC/DC adapter and battery.

AC/DC Adapter

Ensure the xTablet T1110 is connected to an AC power source via the AC adapter before turning it on for the first time. If the xTablet automatically shuts down due to low battery power, it is likely to cause system failure. Below are some Dos and Don'ts for an AC/DC adapter.

Dos

- Use the adapter that shipped with xTablet T1110 only.
- Always be aware of heat coming from the AC/DC adapter while in use.
- Unplug the AC power cord before disassembly the notebook.

Don'ts

- Never cover an adapter that is in use as it can generate heat.
- Have the AC power cord plugged after powering off the system when the notebook is going to be left unused for a longer time.

Plug the AC/DC Adapter

1. Plug the DC end into the USB-C Power Delivery (PD) port of the xTablet T1110.
2. Plug the AC/DC adapter into the power outlet.
3. When removing, follow steps in reverse order.



(NOTE: The interchangeable plug may vary depending on countries or regions.)

Battery

This Tablet is equipped with a built-in Lithium-ion Polymer battery pack. The rechargeable Lithium-ion Polymer battery pack is an internal power source.

The battery pack may be damaged if users attempt to disassemble it. The limited warranty will be voided if the battery pack is disassembled by non-authorized technicians. Please follow your local laws and regulations to recycle the Tablet and the built-in battery pack.

Conserving Battery Power

Efficient battery power is critical to maintain normal operation. If battery power is not managed well, the saved data and customized settings may be lost.

To optimize battery life and avoid sudden power loss, read the tips below:

- Suspend system operation if the system will be idle for a period of time.
- Disable unnecessary settings or remove idle peripherals.
- Connect an AC/DC adapter to the system whenever possible.

Charging the Battery Pack

The built-in battery pack can be recharged when the Tablet is connected to the AC power. Please pay attention to the following tips before recharging the battery:

- You can use the system, suspend system operation or shut down and turn off the system without interrupting the charging process.
- The built-in battery pack uses Lithium-ion Polymer battery cells that have no "memory effect." It is unnecessary to discharge the battery before recharging. However, to optimize the life of battery, we suggest that consuming the battery power completely once a month is necessary.
- The actual charging time will be determined by the applications in use.

(NOTE: Please do not charge battery in temperature below 0° or above 45°C , it may cause safety issue.)



Contact our sales team today | sales@mobiledemand.com | 319.363.4121
1501 Boyson Square Drive | Suite 101 | Hiawatha, Iowa 52233 | 319.363.4121 | RuggedTabletPC.com